




Accept OEM purchase.




TYPE 2




TYPE 2F




TYPE 3




TYPE 3F




TYPE 4




TYPE 7



TYPE 7F



TYPE 8



3M-09/3M-15 | HTD Timing Belt Pulleys



3M-09

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
ALUMINUM	10-3M-09	1F	10	9,55	8,79	13,0	12,0	-	10,2	17,5	-	100	0,004
	12-3M-09	1F	12	11,46	10,70	15,0	15,0	-	10,2	17,5	-	101	0,006
	14-3M-09	1F	14	13,37	12,61	16,0	16,0	-	10,2	17,5	-	102	0,007
	15-3M-09	1F	15	14,32	13,56	18,0	17,5	-	10,2	17,5	-	104	0,008
	16-3M-09	2F	16	15,28	14,52	18,0	10,0	-	12,8	20,6	4	104	0,007
	18-3M-09	2F	18	17,19	16,43	19,5	11,0	-	12,8	20,6	6	105	0,008
	20-3M-09	2F	20	19,10	18,34	23,0	13,0	-	12,8	20,6	6	107	0,010
	21-3M-09	2F	21	20,05	19,29	25,0	14,0	-	12,8	20,6	6	108	0,013
	22-3M-09	2F	22	21,01	20,25	25,0	14,0	-	12,8	20,6	6	108	0,014
	24-3M-09	2F	24	22,92	22,16	25,0	14,0	-	12,8	20,6	6	108	0,016
	26-3M-09	2F	26	24,83	24,07	28,0	16,0	-	12,8	20,6	6	109	0,018
	28-3M-09	2F	28	26,74	25,98	32,0	18,0	-	12,8	20,6	6	110	0,024
	30-3M-09	2F	30	28,65	27,89	32,0	20,0	-	12,8	20,6	6	110	0,028
	32-3M-09	2F	32	30,56	29,80	36,0	22,0	-	12,8	20,6	6	111	0,032
	36-3M-09	2F	36	34,38	33,62	38,0	26,0	-	13,4	22,2	6	112	0,045
	40-3M-09	2F	40	38,20	37,44	42,0	28,0	-	13,4	22,2	6	113	0,055
	44-3M-09	2F	44	42,02	41,26	48,0	33,0	-	13,4	22,2	6	114	0,074
	48-3M-09	2	48	45,84	45,08	-	33,0	-	13,4	22,2	8	-	0,106
	60-3M-09	2	60	57,30	56,54	-	33,0	-	13,4	22,2	8	-	0,106
	72-3M-09	2	72	68,76	68,00	-	33,0	-	13,4	22,2	8	-	0,145

Accept OEM purchase.

3M-15

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
ALUMINUM	10-3M-15	1F	10	9,55	8,79	13,0	12,0	-	17,0	26,0	-	100	0,006
	12-3M-15	1F	12	11,46	10,70	15,0	15,0	-	17,0	26,0	-	101	0,008
	14-3M-15	1F	14	13,37	12,61	16,0	16,0	-	17,0	26,0	-	102	0,010
	15-3M-15	1F	15	14,32	13,56	18,0	17,5	-	17,0	26,0	-	104	0,012
	16-3M-15	2F	16	15,28	14,52	18,0	10,0	-	19,5	26,0	4	104	0,010
	18-3M-15	2F	18	17,19	16,43	19,5	11,0	-	19,5	26,0	6	105	0,012
	20-3M-15	2F	20	19,10	18,34	23,0	13,0	-	19,5	26,0	6	107	0,014
	21-3M-15	2F	21	20,05	19,29	25,0	14,0	-	19,5	26,0	6	108	0,016
	22-3M-15	2F	22	21,01	20,25	25,0	14,0	-	19,5	26,0	6	108	0,018
	24-3M-15	2F	24	22,92	22,16	25,0	14,0	-	19,5	26,0	6	108	0,020
	26-3M-15	2F	26	24,83	24,07	28,0	16,0	-	19,5	26,0	6	109	0,027
	28-3M-15	2F	28	26,74	25,98	32,0	18,0	-	19,5	26,0	6	110	0,031
	30-3M-15	2F	30	28,65	27,89	32,0	20,0	-	19,5	26,0	6	110	0,035
	32-3M-15	2F	32	30,56	29,80	36,0	22,0	-	19,5	26,0	6	111	0,042
	36-3M-15	2F	36	34,38	33,62	38,0	26,0	-	20,0	30,0	6	112	0,060
	40-3M-15	2F	40	38,20	37,44	42,0	28,0	-	20,0	30,0	6	113	0,075
	44-3M-15	2F	44	42,02	41,26	48,0	33,0	-	20,0	30,0	6	114	0,095
	48-3M-15	2	48	45,84	45,08	-	33,0	-	20,0	30,0	8	-	0,103
	60-3M-15	2	60	57,30	56,54	-	33,0	-	20,0	30,0	8	-	0,150
	72-3M-15	2	72	68,76	68,00	-	33,0	-	20,0	30,0	8	-	0,212

Timing Belt Pulleys

5M-09/5M-15 | HTD Timing Belt Pulleys



5M-09

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	12-5M-09	2F	12	19,10	17,96	23	12,5	-	14,5	20,0	6	202	0,03
	14-5M-09	2F	14	22,28	21,14	25	13,5	-	14,5	20,0	6	203	0,04
	15-5M-09	2F	15	23,87	22,73	28	16,0	-	14,5	20,0	6	204	0,05
	16-5M-09	2F	16	25,46	24,32	28	16,5	-	14,5	20,0	6	204	0,06
	18-5M-09	2F	18	28,65	27,51	32	20,0	-	14,5	20,0	6	205	0,07
	20-5M-09	2F	20	31,83	30,69	36	23,0	-	14,5	22,5	6	206	0,10
	21-5M-09	2F	21	33,42	32,28	38	24,0	-	14,5	22,5	6	207	0,12
	22-5M-09	2F	22	35,01	33,87	38	25,5	-	14,5	22,5	6	207	0,13
	24-5M-09	2F	24	38,20	37,06	42	27,0	-	14,5	22,5	6	208	0,15
	26-5M-09	2F	26	41,38	40,24	44	30,0	-	14,5	22,5	6	209	0,18
	28-5M-09	2F	28	44,56	43,42	48	30,5	-	14,5	22,5	6	210	0,21
	30-5M-09	2F	30	47,75	46,60	51	35,0	-	14,5	22,5	6	211	0,25
	32-5M-09	2F	32	50,93	49,79	54	38,0	-	14,5	22,5	8	212	0,28
	36-5M-09	2F	36	57,30	56,16	60	38,0	-	14,5	22,5	8	214	0,33
	40-5M-09	2F	40	63,66	62,52	71	38,0	-	14,5	22,5	8	217	0,42
	ALUMINUM	44-5M-09	2	44	70,03	68,89	-	38,0	-	14,5	22,5	8	-
48-5M-09		2	48	76,39	75,25	-	45,0	-	14,5	22,5	8	-	0,18
60-5M-09		2	60	95,49	94,35	-	45,0	-	14,5	22,5	8	-	0,23
72-5M-09		2	72	114,59	113,45	-	45,0	-	14,5	22,5	8	-	0,42

Accept OEM purchase.

5M-15

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	12-5M-15	2F	12	19,10	17,96	23	12,5	-	20,5	26	6	202	0,03
	14-5M-15	2F	14	22,28	21,14	25	13,5	-	20,5	26	6	203	0,04
	15-5M-15	2F	15	23,87	22,73	28	16,0	-	20,5	26	6	204	0,05
	16-5M-15	2F	16	25,46	24,32	28	16,5	-	20,5	26	6	204	0,06
	18-5M-15	2F	18	28,65	27,51	32	20,0	-	20,5	26	6	205	0,09
	20-5M-15	2F	20	31,83	30,69	36	23,0	-	20,5	26	6	206	0,12
	21-5M-15	2F	21	33,42	32,28	38	24,0	-	20,5	26	6	207	0,14
	22-5M-15	2F	22	35,01	33,87	38	25,5	-	20,5	26	6	207	0,15
	24-5M-15	2F	24	38,20	37,06	42	27,0	-	20,5	28	6	208	0,19
	26-5M-15	2F	26	41,38	40,24	44	30,0	-	20,5	28	6	209	0,23
	28-5M-15	2F	28	44,56	43,42	48	30,5	-	20,5	28	6	210	0,26
	30-5M-15	2F	30	47,75	46,60	51	35,0	-	20,5	28	6	211	0,32
	32-5M-15	2F	32	50,93	49,79	54	38,0	-	20,5	28	8	212	0,35
	36-5M-15	2F	36	57,30	56,16	60	38,0	-	20,5	28	8	214	0,43
	40-5M-15	2F	40	63,66	62,52	71	38,0	-	20,5	28	8	217	0,52
	ALUMINUM	44-5M-15	2	44	70,03	68,89	-	38,0	-	20,5	30	8	-
48-5M-15		2	48	76,39	75,25	-	38,0	-	20,5	30	8	-	0,29
60-5M-15		2	60	95,49	94,35	-	50,0	-	20,5	30	8	-	0,30
72-5M-15		2	72	114,59	113,45	-	50,0	-	20,5	30	8	-	0,59

5M-25/8M-20 | HTD Timing Belt Pulleys



5M-25

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	12-5M-25	2F	12	19,10	17,96	23	12,5	-	30,5	36	6	202	0,05
	14-5M-25	2F	14	22,28	21,14	25	13,5	-	30,5	36	6	203	0,08
	15-5M-25	2F	15	23,87	22,73	28	16,0	-	30,5	36	6	204	0,09
	16-5M-25	2F	16	25,46	24,32	28	16,5	-	30,5	36	6	204	0,11
	18-5M-25	2F	18	28,65	27,51	32	20,0	-	30,5	36	6	205	0,13
	20-5M-25	2F	20	31,83	30,69	36	23,0	-	30,5	36	6	206	0,17
	21-5M-25	2F	21	33,42	32,28	38	24,0	-	30,5	38	6	207	0,20
	22-5M-25	2F	22	35,01	33,87	38	25,5	-	30,5	38	6	207	0,22
	24-5M-25	2F	24	38,20	37,06	42	27,0	-	30,5	38	6	208	0,26
	26-5M-25	2F	26	41,38	40,24	44	30,0	-	30,5	38	6	209	0,32
	28-5M-25	2F	28	44,56	43,42	48	30,5	-	30,5	38	6	210	0,37
	30-5M-25	2F	30	47,75	46,60	51	35,0	-	30,5	38	6	211	0,44
	32-5M-25	2F	32	50,93	49,79	54	38,0	-	30,5	38	8	212	0,48
	36-5M-25	2F	36	57,30	56,16	60	38,0	-	30,5	38	8	214	0,59
	40-5M-25	2F	40	63,66	62,52	71	38,0	-	30,5	38	8	217	0,75
	ALUMINUM	44-5M-25	2	44	70,03	68,89	-	38,0	-	30,5	40	8	-
48-5M-25		2	48	76,39	75,25	-	38,0	-	30,5	40	8	-	0,28
60-5M-25		2	60	95,49	94,35	-	50,0	-	30,5	40	8	-	0,44
72-5M-25		2	72	114,59	113,45	-	50,0	-	30,5	40	8	-	0,85

Accept OEM purchase.

8M-20

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	22-8M-20	2F	22	56,02	54,65	60	43	-	28	38	12	308	0,54
	24-8M-20	2F	24	61,11	59,74	66	45	-	28	38	12	310	0,65
	26-8M-20	2F	26	66,21	64,84	71	48	-	28	38	12	311	0,80
	28-8M-20	2F	28	71,30	70,08	75	50	-	28	38	14	312	0,88
	30-8M-20	2F	30	76,39	75,13	83	55	-	28	38	14	314	1,00
	32-8M-20	2F	32	81,49	80,16	87	60	-	28	38	14	315	1,20
	34-8M-20	2F	34	86,58	85,21	91	66	-	28	38	14	316	1,40
	36-8M-20	2F	36	91,67	90,30	98	70	-	28	38	14	319	1,60
	38-8M-20	2F	38	96,77	95,39	103	75	-	28	38	14	320	1,70
	40-8M-20	2F	40	101,86	100,49	106	75	-	28	38	14	321	1,85
	44-8M-20	2F	44	112,05	110,67	119	75	-	28	38	14	325	2,10
	48-8M-20	2F	48	122,23	120,86	127	75	-	28	38	14	327	2,50
	56-8M-20	3F	56	142,60	141,23	148	80	116	28	38	14	333	2,82
	64-8M-20	3F	64	162,97	161,60	168	80	137	28	38	14	338	3,22
	72-8M-20	3F	72	183,35	181,97	192	80	158	28	38	14	340	3,74
	ALUMINUM	80-8M-20	3	80	203,72	202,35	-	90	180	28	38	14	-
90-8M-20		3	90	229,18	227,81	-	90	204	28	38	14	-	4,57
*112-8M-20		4	112	285,21	283,83	-	90	254	28	38	18	-	-
*144-8M-20		4	144	366,69	365,32	-	90	336	28	38	20	-	-
*168-8M-20		4	168	427,81	426,44	-	100	400	28	38	20	-	-
*192-8M-20		4	192	488,92	487,55	-	100	460	28	38	20	-	-

Timing Belt Pulleys

8M-30/8M-50 | HTD Timing Belt Pulleys



8M-30

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	22-8M-30	2F	22	56,02	54,65	60	43	-	38	48	12	308	0,75
	24-8M-30	2F	24	61,11	59,74	66	45	-	38	48	12	310	0,90
	26-8M-30	2F	26	66,21	64,84	71	48	-	38	48	12	311	1,10
	28-8M-30	2F	28	71,30	70,08	75	50	-	38	48	14	312	1,20
	30-8M-30	2F	30	76,39	75,13	83	55	-	38	48	14	314	1,32
	32-8M-30	2F	32	81,49	80,16	87	60	-	38	48	14	315	1,55
	34-8M-30	2F	34	86,58	85,21	91	66	-	38	48	14	316	1,80
	36-8M-30	2F	36	91,67	90,30	98,5	70	-	38	48	14	319	2,10
	38-8M-30	2F	38	96,77	95,39	103	75	-	38	48	14	320	2,30
	40-8M-30	2F	40	101,86	100,49	106	75	-	38	48	14	321	2,47
	44-8M-30	2F	44	112,05	110,67	119	75	-	38	48	14	325	2,95
	48-8M-30	2F	48	122,23	120,86	127	75	-	38	48	14	327	3,30
	56-8M-30	3F	56	142,60	141,23	148	90	116	38	48	14	333	4,02
	64-8M-30	3F	64	162,97	161,60	168	90	137	38	48	14	338	4,60
72-8M-30	3F	72	183,35	181,97	192	95	158	38	48	14	340	5,41	
CAST IRON	80-8M-30	3	80	203,72	202,35	-	100	180	38	48	14	-	5,23
	90-8M-30	3	90	229,18	227,81	-	100	204	38	48	14	-	6,42
	112-8M-30	4	112	285,21	283,83	-	100	254	38	48	18	-	8,12
	144-8M-30	4	144	366,69	365,32	-	100	336	38	48	20	-	10,36
	168-8M-30	4	168	427,81	426,44	-	100	400	38	48	20	-	12,37
	192-8M-30	4	192	488,92	487,55	-	100	460	38	48	20	-	14,31

Accept OEM purchase.

8M-50

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	22-8M-50	2F	22	56,02	54,65	60	43	-	60	70	12	308	1,10
	24-8M-50	2F	24	61,11	59,74	66	45	-	60	70	12	310	1,30
	26-8M-50	2F	26	66,21	64,84	71	48	-	60	70	12	311	1,60
	28-8M-50	2F	28	71,30	70,08	75	50	-	60	70	14	312	1,70
	30-8M-50	2F	30	76,39	75,13	83	55	-	60	70	14	314	2,00
	32-8M-50	2F	32	81,49	80,16	87	60	-	60	70	14	315	2,35
	34-8M-50	2F	34	86,58	85,21	91	66	-	60	70	14	316	2,80
	36-8M-50	2F	36	91,67	90,30	98,5	70	-	60	70	14	319	3,10
	38-8M-50	2F	38	96,77	95,39	103	75	-	60	70	14	320	3,30
	40-8M-50	2F	40	101,86	100,49	106	75	-	60	70	14	321	3,60
	44-8M-50	2F	44	112,05	110,67	119	75	-	60	70	14	325	4,40
	48-8M-50	2F	48	122,23	120,86	127	75	-	60	70	14	327	5,00
	56-8M-50	7F	56	142,60	141,23	148	90	116	60	60	18	333	5,68
	64-8M-50	7F	64	162,97	161,60	168	100	137	60	60	18	338	6,93
72-8M-50	7F	72	183,35	181,97	192	100	158	60	60	18	340	7,95	
CAST IRON	80-8M-50	7	80	203,72	202,35	-	110	180	60	60	18	-	7,96
	90-8M-50	7	90	229,18	227,81	-	110	204	60	60	18	-	9,20
	112-8M-50	8	112	285,21	283,83	-	110	254	60	60	18	-	12,16
	144-8M-50	8	144	366,69	365,32	-	110	336	60	60	20	-	15,68
	168-8M-50	8	168	427,81	426,44	-	120	400	60	60	20	-	18,99
	192-8M-50	8	192	488,92	487,55	-	130	460	60	60	20	-	24,09

8M-85/14M-40 | HTD Timing Belt Pulleys



8M-85

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	22-8M-85	2F	22	56,02	54,65	60	43	-	95	105	12	308	1,60
	24-8M-85	2F	24	61,11	59,74	66	45	-	95	105	12	310	1,95
	26-8M-85	2F	26	66,21	64,84	71	48	-	95	105	12	311	2,30
	28-8M-85	2F	28	71,30	70,08	75	50	-	95	105	14	312	2,60
	30-8M-85	2F	30	76,39	75,13	83	55	-	95	105	14	314	3,10
	32-8M-85	2F	32	81,49	80,16	87	60	-	95	105	14	315	3,70
	34-8M-85	2F	34	86,58	85,21	91	66	-	95	105	14	316	4,00
	36-8M-85	2F	36	91,67	90,30	98	70	-	95	105	14	319	4,70
	38-8M-85	2F	38	96,77	95,39	103	75	-	95	105	14	320	5,10
	40-8M-85	2F	40	101,86	100,49	106	75	-	95	105	14	321	5,40
	44-8M-85	2F	44	112,05	110,67	119	75	-	95	105	14	325	6,70
	48-8M-85	2F	48	122,23	120,86	127	75	-	95	105	14	327	7,20
	56-8M-85	2F	56	142,60	141,23	148	80	-	95	105	18	333	11,48
	64-8M-85	7F	64	162,97	161,60	168	100	137	95	95	18	338	11,02
72-8M-85	7F	72	183,35	181,97	192	110	158	95	95	18	340	13,45	
CAST IRON	80-8M-85	8	80	203,72	202,35	-	110	180	95	95	20	-	12,36
	90-8M-85	8	90	229,18	227,81	-	110	204	95	95	20	-	14,38
	112-8M-85	8	112	285,21	283,83	-	110	254	95	95	24	-	18,66
	144-8M-85	8	144	366,69	365,32	-	120	341	95	95	24	-	-
	168-8M-85	8	168	427,81	426,44	-	120	400	95	95	24	-	-
	192-8M-85	8	192	488,92	487,55	-	130	460	95	95	24	-	-

Accept OEM purchase.

14M-40

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE of FLANGE	Kg
STEEL	28-14M-40	2F	28	124,78	122,12	127	100	-	54	69	24	400	4,80
	30-14M-40	2F	30	133,69	130,99	138	100	-	54	69	24	401	5,60
	32-14M-40	2F	32	142,60	139,88	154	100	-	54	69	24	403	6,20
	34-14M-40	2F	34	151,52	148,79	160	100	-	54	69	24	404	6,90
	36-14M-40	2F	36	160,43	157,68	168	100	-	54	69	24	405	7,70
	38-14M-40	2F	38	169,34	166,60	183	120	-	54	69	24	406	8,90
	40-14M-40	2F	40	178,25	175,49	188	120	-	54	69	24	407	9,80
	44-14M-40	2F	44	196,08	193,28	211	120	-	54	69	24	411	12,00
	CAST IRON	48-14M-40	3F	48	213,90	211,11	226	135	170	54	69	24	412
56-14M-40		3F	56	249,55	246,76	256	135	207	54	69	28	416	14,01
64-14M-40		3F	64	285,21	282,41	296	135	240	54	69	28	418	16,65
72-14M-40		4	72	320,86	318,06	-	135	278	54	69	28	-	15,52
80-14M-40		4	80	356,51	353,71	-	135	314	54	69	28	-	17,23
90-14M-40		4	90	401,07	398,28	-	135	358	54	69	28	-	19,40
112-14M-40		4	112	499,11	496,32	-	135	456	54	69	28	-	24,14
*144-14M-40		4	144	641,71	638,92	-	135	600	54	69	28	-	-
*168-14M-40		4	168	748,66	745,87	-	135	706	54	69	28	-	-
*192-14M-40		4	192	855,62	852,82	-	135	813	54	69	28	-	-

14M-55/14M-85 | HTD Timing Belt Pulleys



14M-55














MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE OF FLANGE	Kg
STEEL	28-14M-55	2F	28	124,78	122,12	127	100	-	70	85	24	400	5,70
	30-14M-55	2F	30	133,69	130,99	138	100	-	70	85	24	401	7,10
	32-14M-55	2F	32	142,60	139,88	154	100	-	70	85	24	403	7,90
	34-14M-55	2F	34	151,52	148,79	160	100	-	70	85	24	404	9,33
	36-14M-55	2F	36	160,43	157,68	168	100	-	70	85	24	405	10,49
	38-14M-55	2F	38	169,34	166,60	183	120	-	70	85	24	406	12,11
	40-14M-55	2F	40	178,25	175,49	188	120	-	70	85	24	407	13,30
	44-14M-55	2F	44	196,08	193,28	211	120	-	70	85	24	411	16,12
	CAST IRON	48-14M-55	7F	48	213,90	211,11	226	135	170	70	70	24	412
56-14M-55		7F	56	249,55	246,76	256	135	207	70	70	28	416	15,78
64-14M-55		7F	64	285,21	282,41	296	135	240	70	70	28	418	19,04
72-14M-55		8	72	320,86	318,06	-	135	278	70	70	28	-	18,41
80-14M-55		8	80	356,51	353,71	-	135	314	70	70	28	-	20,27
90-14M-55		8	90	401,07	398,28	-	135	358	70	70	28	-	22,98
112-14M-55		8	112	499,11	496,32	-	135	456	70	70	28	-	29,29
144-14M-55		8	144	641,71	638,92	-	135	600	70	70	28	-	-
168-14M-55		8	168	748,66	745,87	-	135	706	70	70	28	-	-
192-14M-55		8	192	855,62	852,82	-	135	813	70	70	28	-	-

Accept OEM purchase.

14M-85

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE OF FLANGE	Kg
STEEL	28-14M-85	2F	28	124,78	122,12	127	100	-	102	117	24	400	8,77
	30-14M-85	2F	30	133,69	130,99	138	100	-	102	117	24	401	10,13
	32-14M-85	2F	32	142,60	139,88	154	100	-	102	117	24	403	11,65
	34-14M-85	2F	34	151,52	148,79	160	100	-	102	117	24	404	13,15
	36-14M-85	2F	36	160,43	157,68	168	100	-	102	117	32	405	14,48
	38-14M-85	2F	38	169,34	166,60	183	120	-	102	117	32	406	16,62
	40-14M-85	2F	40	178,25	175,49	188	135	-	102	117	32	407	18,84
	44-14M-85	2F	44	196,08	193,28	211	135	-	102	117	32	411	22,86
	48-14M-85	2F	48	213,90	211,11	226	150	-	102	117	32	412	27,58
CAST IRON	56-14M-85	7F	56	249,55	246,76	256	150	207	102	102	32	416	24,19
	64-14M-85	7F	64	285,21	282,41	296	150	240	102	102	32	418	28,57
	72-14M-85	8	72	320,86	318,06	-	150	278	102	102	32	-	28,26
	80-14M-85	8	80	356,51	353,71	-	150	314	102	102	32	-	31,00
	90-14M-85	8	90	401,07	398,28	-	150	358	102	102	32	-	35,00
	112-14M-85	8	112	499,11	496,32	-	150	456	102	102	32	-	43,50
	144-14M-85	8	144	641,71	638,92	-	150	600	102	102	32	-	-
	168-14M-85	8	168	748,66	745,87	-	150	706	102	102	32	-	-
	192-14M-85	8	192	855,62	852,82	-	165	813	102	102	32	-	-

HTD Timing Belt Pulleys For Taper Bushes

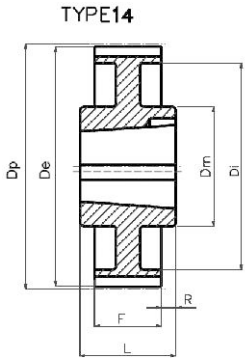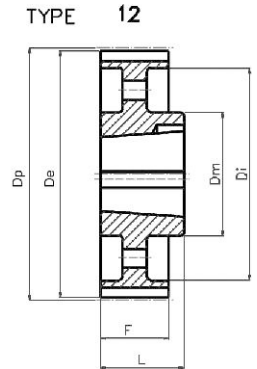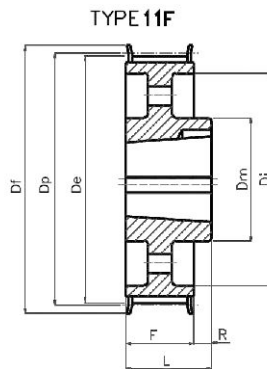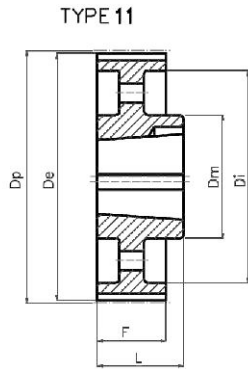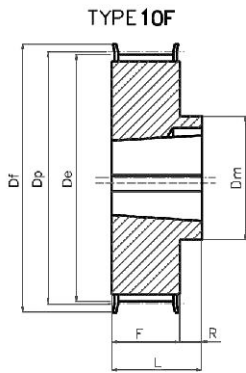

14M-115/14M-170 | HTD Timing Belt Pulleys



14M-115

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE OF FLANGE	Kg	
STEEL	28-14M-155	2F	28	124,78	122,12	127	100	-	133	148	32	400	10,75	
	30-14M-155	2F	30	133,69	130,99	138	100	-	133	148	32	401	12,52	
	32-14M-155	2F	32	142,60	139,88	154	100	-	133	148	32	403	14,48	
	34-14M-155	2F	34	151,52	148,79	160	100	-	133	148	32	404	16,45	
	36-14M-155	2F	36	160,43	157,68	168	120	-	133	148	32	405	18,99	
	38-14M-155	2F	38	169,34	166,60	183	120	-	133	148	32	406	21,31	
	40-14M-155	2F	40	178,25	175,49	188	135	-	133	148	32	407	24,04	
	44-14M-155	2F	44	196,08	193,28	211	140	-	133	148	32	411	29,41	
	48-14M-155	2F	48	213,90	211,11	226	150	-	133	148	32	412	35,00	
	56-14M-155	2F	56	249,55	246,76	256	150	-	133	148	32	416	48,00	
	CAST IRON	64-14M-155	7F	64	285,21	282,41	296	150	240	133	133	32	418	36,00
		72-14M-155	8	72	320,86	318,06	-	150	278	133	133	32	-	36,00
80-14M-155		8	80	356,51	353,71	-	150	314	133	133	32	-	40,00	
90-14M-155		8	90	401,07	398,28	-	150	358	133	133	32	-	45,00	
112-14M-155		8	112	499,11	496,32	-	150	456	133	133	32	-	55,50	
144-14M-155		8	144	641,71	638,92	-	165	600	133	133	32	-	-	
168-14M-155		8	168	748,66	745,87	-	165	706	133	133	32	-	-	
192-14M-155		8	192	855,62	852,82	-	165	813	133	133	32	-	-	

Accept OEM purchase.

14M-170

MATERIAL	CODE	TYPE	TEETH	Dp	De	Df	Dm	Di	F	L	d	TYPE OF FLANGE	Kg
STEEL	28-14M-170	2F	28	124,78	122,12	127	100	-	187	202	32	400	14,79
	30-14M-170	2F	30	133,69	130,99	138	100	-	187	202	32	401	17,24
	32-14M-170	2F	32	142,60	139,88	154	100	-	187	202	32	403	19,92
	34-14M-170	2F	34	151,52	148,79	160	100	-	187	202	32	404	22,72
	36-14M-170	2F	36	160,43	157,68	168	120	-	187	202	32	405	26,07
	38-14M-170	2F	38	169,34	166,60	183	135	-	187	202	32	406	29,71
	40-14M-170	2F	40	178,25	175,49	188	140	-	187	202	32	407	33,50
	44-14M-170	2F	44	196,08	193,28	211	160	-	187	202	32	411	-
	48-14M-170	2F	48	213,90	211,11	226	160	-	187	202	32	412	-
	56-14M-170	2F	56	249,55	246,76	256	160	-	187	202	32	416	-
	64-14M-170	2F	64	285,21	282,41	296	180	-	187	202	32	418	-
	CAST IRON	72-14M-170	7	72	320,86	318,06	-	180	278	187	187	32	-
80-14M-170		7	80	356,51	353,71	-	180	314	187	187	32	-	71,00
90-14M-170		8	90	401,07	398,28	-	180	358	187	187	38	-	73,00
112-14M-170		8	112	499,11	496,32	-	200	456	187	187	38	-	95,00
144-14M-170		8	144	641,71	638,92	-	220	600	187	187	38	-	-
168-14M-170		8	168	748,66	745,87	-	220	706	187	187	38	-	-
192-14M-170	8	192	855,62	852,82	-	220	813	187	187	38	-	-	

8M-20/8M-30 | HTD Timing Belt Pulleys For Taper Bushes



Taper Bore

8M-20

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL22-8M-20	16F	22	1008	25	56,02	54,65	60	-	37	28	22	6	308	0,25
	TL24-8M-20	16F	24	1108	25	61,11	59,74	66	-	44	28	22	6	310	0,30
	TL26-8M-20	16F	26	1108	25	66,21	64,84	71	-	45	28	22	6	311	0,36
	TL28-8M-20	16F	28	1108	25	71,30	70,08	75	-	50	28	22	6	312	0,45
	TL30-8M-20	16F	30	1108	25	76,39	75,13	83	-	58	28	22	6	314	0,55
	TL32-8M-20	16F	32	1610	42	81,49	80,16	87	-	63	28	25	3	315	0,43
	TL34-8M-20	16F	34	1610	42	86,58	85,21	91	-	64	28	25	3	316	0,57
	TL36-8M-20	16F	36	1610	42	91,67	90,30	98	-	68	28	25	3	319	0,70
	TL38-8M-20	16F	38	1610	42	96,77	95,39	103	-	72	28	25	3	320	0,82
	TL40-8M-20	16F	40	1610	42	101,86	100,49	106	-	76	28	25	3	321	1,10
	TL44-8M-20	10F	44	2012	50	112,05	110,67	119	92	-	28	32	4	325	1,20
	TL48-8M-20	10F	48	2012	50	122,23	120,86	127	96	-	28	32	4	327	1,65
	TL56-8M-20	10F	56	2012	50	142,60	141,23	148	110	-	28	32	4	333	2,50
	TL64-8M-20	11F	64	2012	50	162,97	161,60	168	110	137	28	32	4	338	2,60
TL72-8M-20	11F	72	2012	50	183,35	181,97	192	110	158	28	32	4	340	3,40	
CAST IRON	TL80-8M-20	11	80	2012	50	203,72	202,35	-	110	180	28	32	4	-	3,60
	TL90-8M-20	11	90	2012	50	229,18	227,81	-	110	204	28	32	4	-	4,10

8M-30

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL22-8M-30	16F	22	1008	25	56,02	54,65	60	-	37	38	22	16	308	0,33
	TL24-8M-30	16F	24	1108	25	61,11	59,74	66	-	44	38	22	16	310	0,40
	TL26-8M-30	16F	26	1108	25	66,21	64,84	71	-	44	38	22	16	311	0,45
	TL28-8M-30	16F	28	1210	32	71,30	70,08	75	-	50	38	25	13	312	0,50
	TL30-8M-30	15F	30	1615	42	76,39	75,13	83	-	-	38	38	-	314	0,55
	TL32-8M-30	15F	32	1615	42	81,49	80,16	87	-	-	38	38	-	315	0,60
	TL34-8M-30	15F	34	1615	42	86,58	85,21	91	-	-	38	38	-	316	0,80
	TL36-8M-30	15F	36	1615	42	91,67	90,30	98	-	-	38	38	-	319	1,00
	TL38-8M-30	15F	38	1615	42	96,77	95,39	103	-	-	38	38	-	320	1,10
	TL40-8M-30	15F	40	1615	42	101,86	100,49	106	-	-	38	38	-	321	1,34
	TL44-8M-30	18F	44	2012	50	112,05	110,67	119		86	38	32	3	325	1,30
	TL48-8M-30	18F	48	2012	50	122,23	120,86	127		90	38	32	3	327	1,80
	TL56-8M-30	18F	56	2012	50	142,60	141,23	148		110	38	32	3	333	3,80
	TL64-8M-30	10F	64	2517	60	162,97	161,60	168	125	-	38	45	7	338	4,30
TL72-8M-30	11F	72	2517	60	183,35	181,97	192	125	158	38	45	7	340	4,40	
CAST IRON	TL80-8M-30	11	80	2517	60	203,72	202,35	-	125	180	38	45	7	-	4,65
	TL90-8M-30	11	90	2517	60	229,18	227,81	-	125	204	38	45	7	-	5,80
	TL112-8M-30	12	112	2517	60	285,21	283,83	-	125	254	38	45	7	-	6,20
	TL144-8M-30	12	144	2517	60	366,69	365,32	-	125	336	38	45	7	-	9,00

8M-50/8M-85 | HTD Timing Belt Pulleys For Taper Bushes



Taper Bore

8M-50

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL 28-8M-20	16F	28	1210	32	71,30	70,08	75	-	50	60	25	35	312	0,60
	TL 30-8M-20	16F	30	1615	42	76,39	75,13	83	-	58	60	38	22	314	0,65
	TL 32-8M-20	16F	32	1615	42	81,49	80,16	87	-	63	60	38	22	315	0,80
	TL 34-8M-20	16F	34	1615	42	86,58	85,21	91	-	65	60	38	22	316	1,08
	TL 36-8M-20	16F	36	1615	42	91,67	90,30	98	-	68	60	38	22	319	1,35
	TL 38-8M-20	16F	38	1615	42	96,77	95,39	103	-	72	60	38	22	320	1,65
	TL 40-8M-20	18F	40	2012	50	101,86	100,49	106	-	80	60	32	14	321	1,70
	TL 44-8M-20	18F	44	2012	50	112,05	110,67	119	-	86	60	32	14	325	1,80
	TL 48-8M-20	18F	48	2012	50	122,23	120,86	127	-	95	60	32	14	327	2,35
	TL 56-8M-20	18F	56	2517	60	142,60	141,23	148	-	116	60	45	7,5	333	3,35
	TL 64-8M-20	18F	64	2517	60	162,97	161,60	168	-	136	60	45	7,5	338	4,90
	TL 72-8M-20	19F	72	2517	60	183,35	181,97	192	125	158	60	45	7,5	340	6,90
CAST IRON	TL 80-8M-20	18	80	3020	75	203,72	202,35	-	-	180	60	51	4,5	-	8,90
	TL 90-8M-20	19	90	3020	75	229,18	227,81	-	160	204	60	51	4,5	-	9,90
	TL 112-8M-20	19	112	3020	75	285,21	283,83	-	170	254	60	51	4,5	-	12,10
	TL 144-8M-20	20	144	3020	75	366,69	365,32	-	170	336	60	51	4,5	-	15,40
	TL 168-8M-20	14	168	3525	90	427,81	426,44	-	198	395	60	65	2,5	-	22,80
	TL 192-8M-20	14	192	3525	90	488,92	487,55	-	198	455	60	65	2,5	-	26,50

8M-85

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL 34-8M-20	18F	34	1615	42	86,58	85,22	91	-	65	95	38	28,5	316	1,50
	TL 36-8M-20	18F	36	1615	42	91,67	90,30	98	-	68	95	38	28,5	319	1,90
	TL 38-8M-20	18F	38	1615	42	96,77	95,39	103	-	72	95	38	28,5	320	2,20
	TL 40-8M-20	18F	40	2012	50	101,86	100,49	106	-	80	95	32	31,5	321	1,90
	TL 44-8M-20	18F	44	2012	50	112,05	110,67	119	-	86	95	32	31,5	325	2,30
	TL 48-8M-20	18F	48	2517	60	122,23	120,86	127	-	97	95	45	25	327	2,70
	TL 56-8M-20	18F	56	2517	60	142,60	141,23	148	-	116	95	45	25	333	4,50
	TL 64-8M-20	18F	64	2517	60	162,97	161,60	168	-	136	95	45	25	338	6,30
	TL 72-8M-20	18F	72	3020	75	183,35	181,97	192	-	158	95	51	22	340	8,10
CAST IRON	TL 80-8M-20	18	80	3020	75	203,72	202,35	-	-	180	95	51	22	-	10,20
	TL 90-8M-20	19	90	3020	75	229,18	227,81	-	170	204	95	51	22	-	11,20
	TL 112-8M-20	19	112	3020	75	285,21	283,83	-	170	254	95	51	22	-	15,00
	TL 144-8M-20	20	144	3525	90	366,69	365,32	-	198	336	95	65	15	-	-
	TL 168-8M-20	20	168	3525	90	427,81	426,44	-	198	395	95	65	15	-	-
	TL 192-8M-20	20	192	3525	90	488,92	487,55	-	198	455	95	65	15	-	-



14M-40/14M-55 HTD Timing Belt Pulleys For Taper Bushes

GOODWILL

Taper Bore

14M-40

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL28-14M-40	18F	28	2012	50	124,78	122,12	127	-	94	54	32	11	400	2,10
	TL30-14M-40	18F	30	2012	50	133,69	130,99	138	-	98	54	32	11	401	2,70
	TL32-14M-40	18F	32	2012	50	142,60	139,88	154	-	108	54	32	11	403	3,40
	TL34-14M-40	18F	34	2517	60	151,52	148,79	160	-	110	54	45	4,5	404	3,90
	TL36-14M-40	18F	36	2517	60	160,43	157,68	168	-	120	54	45	4,5	405	4,80
	TL38-14M-40	18F	38	2517	60	169,34	166,60	183	-	130	54	45	4,5	406	5,40
	TL40-14M-40	18F	40	2517	60	178,25	175,49	188	-	138	54	45	4,5	407	6,00
	TL44-14M-40	18F	44	3020	75	196,08	193,28	211	-	155	54	51	1,5	411	-
	TL48-14M-40	18F	48	3020	75	213,90	211,11	226	-	170	54	51	1,5	142	-
CAST IRON	TL56-14M-40	18F	56	3020	75	249,55	246,76	256	-	208	54	51	1,5	416	-
	TL64-14M-40	19F	64	3020	75	285,21	282,41	296	170	240	54	51	1,5	418	-
	TL72-14M-40	19	72	3020	75	320,86	318,06	-	170	280	54	51	1,5	-	15,00
	TL80-14M-40	20	80	3020	75	356,51	353,71	-	170	315	54	51	1,5	-	16,00
	TL90-14M-40	20	90	3020	75	401,07	398,28	-	170	360	54	51	1,5	-	18,00
	TL112-14M-40	20	112	3020	75	499,11	496,32	-	170	457	54	51	1,5	-	25,50
	TL144-14M-40	20	144	3020	75	641,71	638,92	-	170	600	54	51	1,5	-	32,00
	TL168-14M-40	20	168	3020	75	748,66	745,87	-	170	706	54	51	1,5	-	43,50
	TL192-14M-40	20	192	3020	75	855,62	852,82	-	170	813	54	51	1,5	-	49,50

14M-55

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL28-14M-55	18F	28	2012	50	124,78	122,12	127	-	94	70	32	19	400	2,20
	TL30-14M-55	18F	30	2517	60	133,69	130,99	138	-	100	70	45	12,5	401	2,70
	TL32-14M-55	18F	32	2517	60	142,60	139,88	154	-	108	70	45	12,5	403	3,60
	TL34-14M-55	18F	34	2517	60	151,52	148,79	160	-	110	70	45	12,5	404	4,50
	TL36-14M-55	18F	36	2517	60	160,43	157,68	168	-	120	70	45	12,5	405	5,20
	TL38-14M-55	18F	38	2517	60	169,34	166,60	183	-	130	70	45	12,5	406	6,20
	TL40-14M-55	18F	40	2517	60	178,25	175,49	188	-	138	70	45	12,5	407	6,90
	TL44-14M-55	18F	44	3020	75	196,08	193,28	211	-	155	70	51	9,5	411	8,60
	TL48-14M-55	18F	48	3020	75	213,90	211,11	226	-	170	70	51	9,5	142	10,50
CAST IRON	TL56-14M-55	18F	56	3020	75	249,55	246,76	256	170	208	70	51	9,5	416	13,50
	TL64-14M-55	19F	64	3020	75	285,21	282,41	296	170	240	70	51	9,5	418	14,50
	TL72-14M-55	19	72	3020	75	320,86	318,06	-	170	280	70	51	9,5	-	16,30
	TL80-14M-55	20	80	3020	75	356,51	353,71	-	170	315	70	51	9,5	-	17,50
	TL90-14M-55	20	90	3020	75	401,07	398,28	-	170	360	70	51	9,5	-	20,00
	TL112-14M-55	20	112	3020	75	499,11	496,32	-	170	457	70	51	9,5	-	28,20
	TL144-14M-55	20	144	3020	75	641,71	638,92	-	170	600	70	51	9,5	-	36,00
	TL168-14M-55	20	168	3020	75	748,66	745,87	-	170	706	70	51	9,5	-	48,50
	TL192-14M-55	20	192	3020	75	855,62	852,82	-	170	813	70	51	9,5	-	52,00

Timing Belt Pulleys



14M-85/14M-115 | HTD Timing Belt Pulleys For Taper Bushes

GOODWILL

Taper Bore

14M-85

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL28-14M-85	18F	28	2517	60	124,78	122,12	127	-	98	102	45	28,5	400	2,70
	TL30-14M-85	18F	30	2517	60	133,69	130,99	138	-	100	102	45	28,5	401	3,80
	TL32-14M-85	18F	32	2517	60	142,60	139,88	154	-	108	102	45	28,5	403	4,70
	TL34-14M-85	18F	34	2517	60	151,52	148,79	160	-	110	102	45	28,5	404	6,00
	TL36-14M-85	18F	36	3020	75	160,43	157,68	168	-	125	102	51	25,5	405	5,70
	TL38-14M-85	18F	38	3020	75	169,34	166,60	183	-	130	102	51	25,5	406	6,80
	TL85-14M-85	18F	40	3020	75	178,25	175,49	188	-	138	102	51	25,5	407	8,00
	TL44-14M-85	18F	44	3030	75	196,08	193,28	211	-	155	102	76	13	411	11,70
	TL48-14M-85	18F	48	3030	75	213,90	211,11	226	-	170	102	76	13	142	15,00
CAST IRON	TL56-14M-85	18F	56	3525	90	249,55	246,76	256	-	210	102	65	18,5	416	19,00
	TL64-14M-85	19F	64	3525	90	285,21	282,41	296	190	240	102	65	18,5	418	23,50
	TL72-14M-85	19	72	3525	90	320,86	318,06	-	190	280	102	65	18,5	-	25,00
	TL80-14M-85	20	80	3525	90	356,51	353,71	-	190	315	102	65	18,5	-	26,00
	TL90-14M-85	20	90	3525	90	401,07	398,28	-	190	360	102	65	18,5	-	28,00
	TL112-14M-85	20	112	3525	90	499,11	496,32	-	190	457	102	65	18,5	-	36,00
	TL144-14M-85	20	144	3525	90	641,71	638,92	-	190	600	102	65	18,5	-	48,00
	TL168-14M-85	20	168	3525	90	748,66	745,87	-	190	706	102	65	18,5	-	60,00
	TL192-14M-85	22	192	4040	100	855,62	852,82	-	230	813	102	102	-	-	85,00

14M-115

MATERIAL	CODE	TYPE	TEETH	BUSH	MAX BORE	Dp	De	Df	Dm	Di	F	L	R	TYPE OF FLANGE	Kg
STEEL	TL28-14M-115	18F	28	2517	60	124,78	122,12	127	-	98	133	45	44	400	3,80
	TL30-14M-115	18F	30	2517	60	133,69	130,99	138	-	100	133	45	44	401	5,00
	TL32-14M-115	18F	32	2517	60	142,60	139,88	154	-	108	133	45	44	403	6,80
	TL34-14M-115	18F	34	2517	60	151,52	148,79	160	-	110	133	45	44	404	6,90
	TL36-14M-115	18F	36	3020	75	160,43	157,68	168	-	125	133	51	41	405	7,00
	TL38-14M-115	18F	38	3020	75	169,34	166,60	183	-	130	133	51	41	406	8,50
	TL40-14M-115	18F	40	3020	75	178,25	175,49	188	-	138	133	51	41	407	9,10
	TL44-14M-115	18F	44	3030	75	196,08	193,28	211	-	155	133	76	28,5	411	-
	TL48-14M-115	18F	48	3030	75	213,90	211,11	226	-	170	133	76	28,5	142	-
CAST IRON	TL56-14M-115	18F	56	3535	90	249,55	246,76	256	-	210	133	89	22	416	-
	TL64-14M-115	19F	64	3535	90	285,21	282,41	296	190	240	133	89	22	418	-
	TL72-14M-115	19	72	3535	90	320,86	318,06	-	190	280	133	89	22	-	-
	TL80-14M-115	20	80	3535	90	356,51	353,71	-	190	315	133	89	22	-	32,00
	TL90-14M-115	20	90	3535	90	401,07	398,28	-	190	360	133	89	22	-	37,00
	TL112-14M-115	20	112	3535	90	499,11	496,32	-	190	457	133	89	22	-	45,00
	TL144-14M-115	20	144	4040	100	641,71	638,92	-	230	600	133	102	15,5	-	-
	TL168-14M-115	20	168	4040	100	748,66	745,87	-	230	706	133	102	15,5	-	-
	TL192-14M-115	20	192	4040	100	855,62	852,82	-	230	813	133	102	15,5	-	95,00